

Step by step procedure to dis-assemble OPPO 105/105D

This is step by step procedure to dis-assemble OPPO 105/105D to install new Linear power module or take out the mother board or Analog DAC board to modify service.


1. Unscrew the bolts



when cover is opened.it looks as like this



To access switching power module, multi channel DAC board must be taken out first.

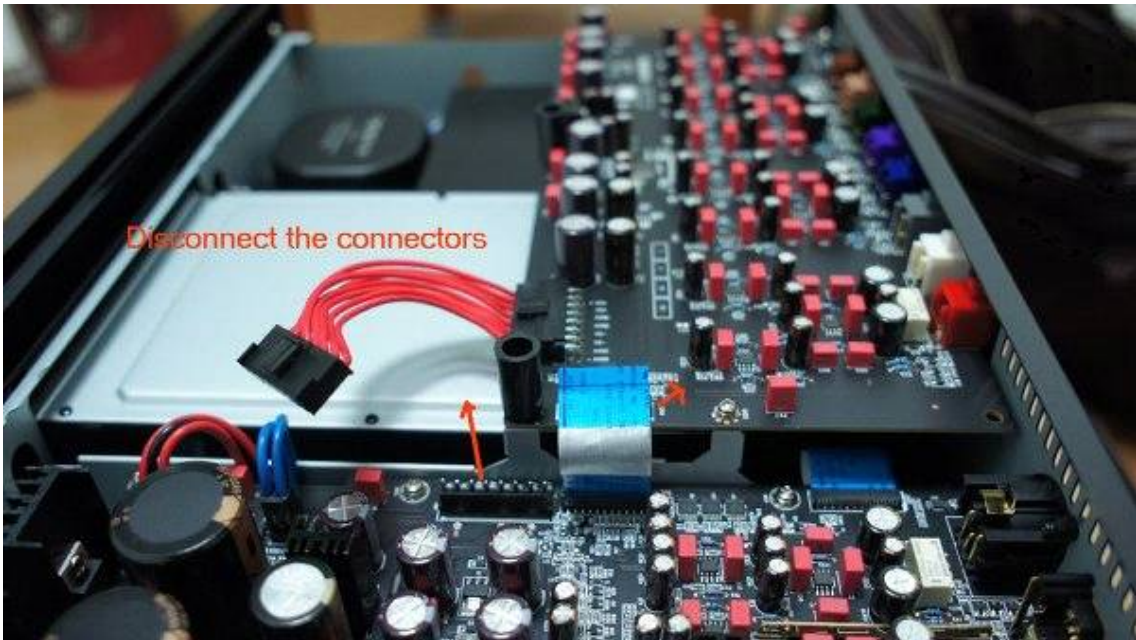

Unscrew the bolts (8 of them)





To take out 2 channel DAC boars, these connectors must be detached.





Unscrew the bolts



take out boards slightly




to take out switching power supply boars, 6 screws must be unscrewed.




take out switching power PCB at right side.




In order to remove mother board in these connectors' cables must be disconnected.

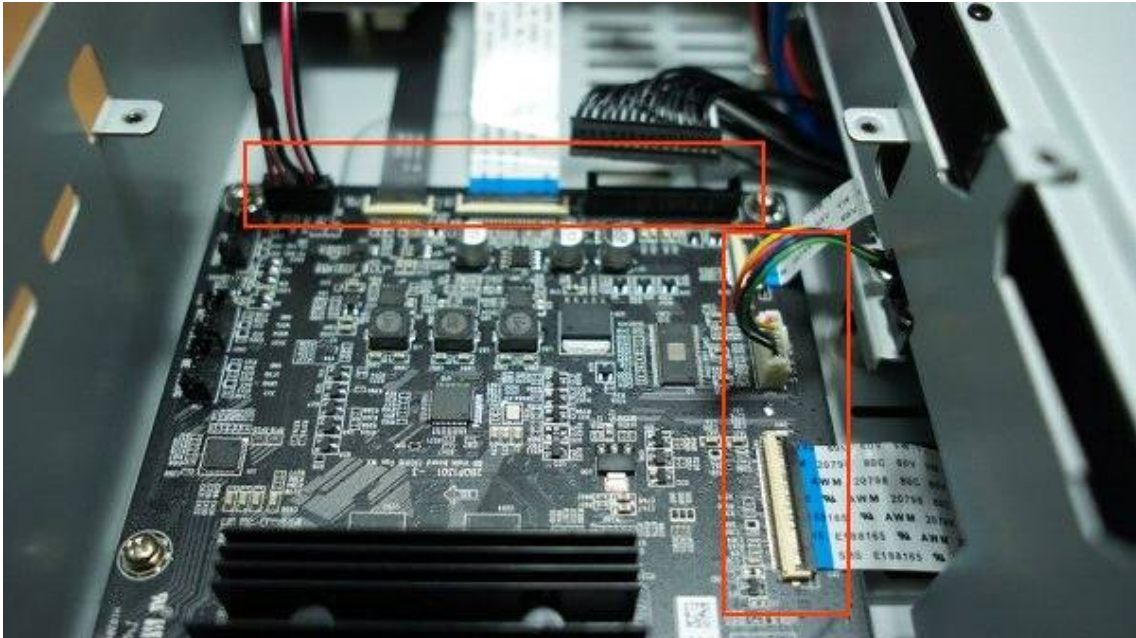


Flip the flat cable connector lid with finger and detach 15 pin power cable

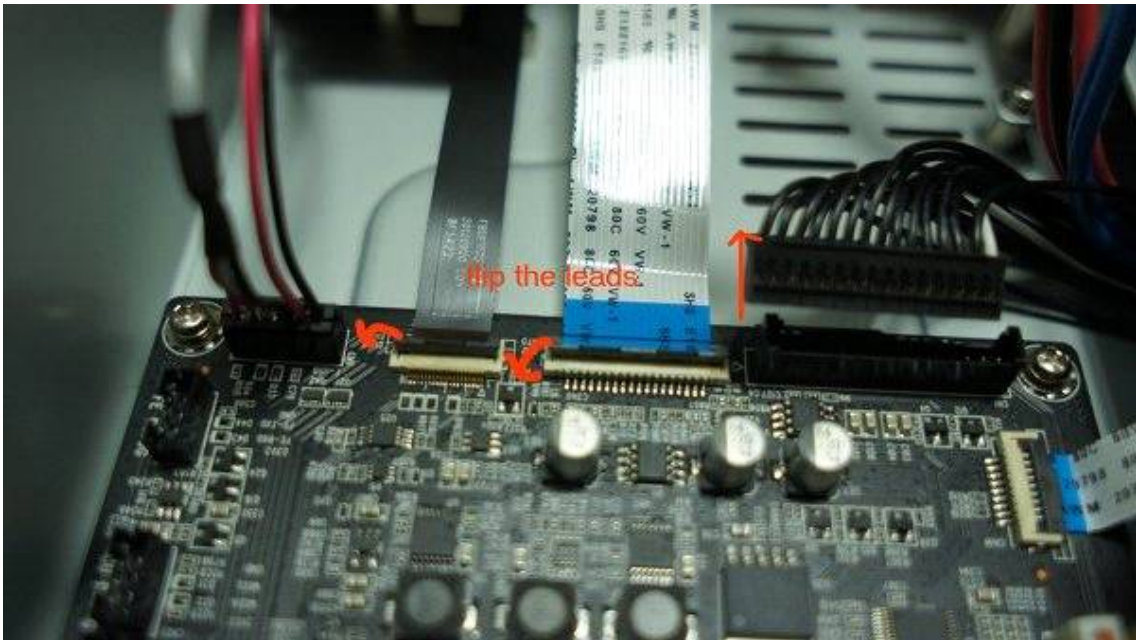



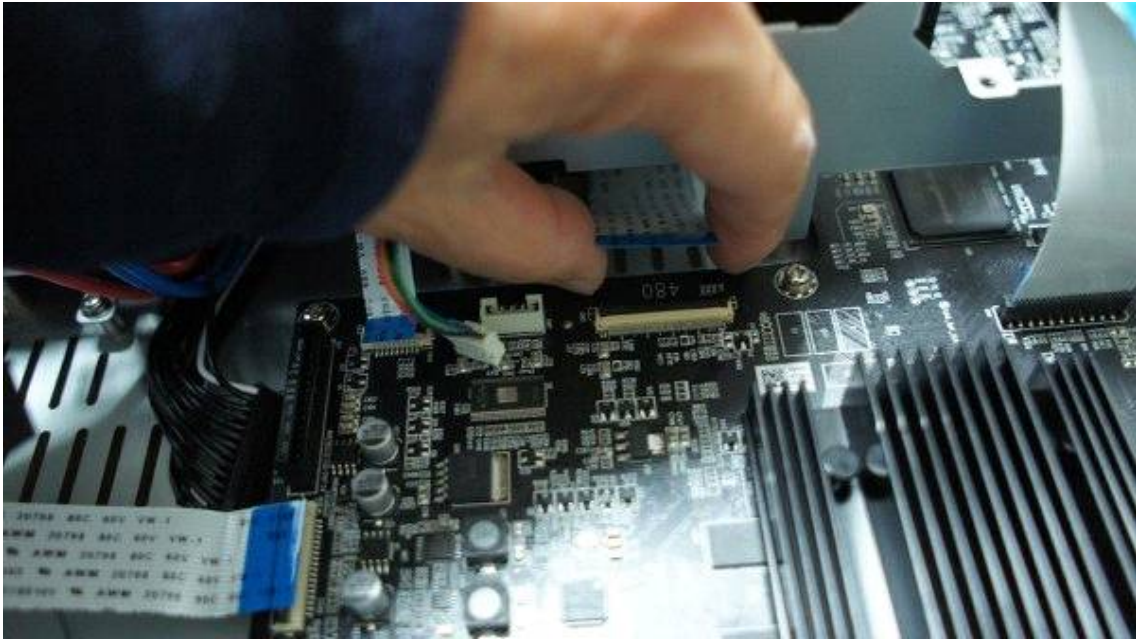

flat cable to SPDIF board also be disconnected.

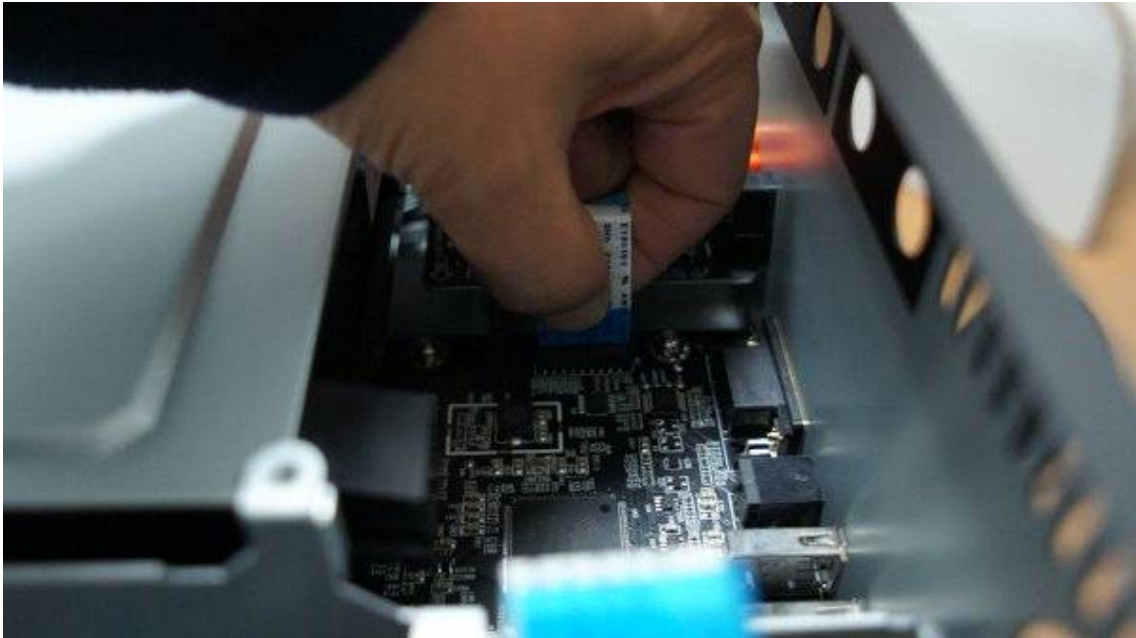



Take out sub -frames at both sides



Now all cables are disconnected.



Unscrew the bolts




Use this



take out the mother board



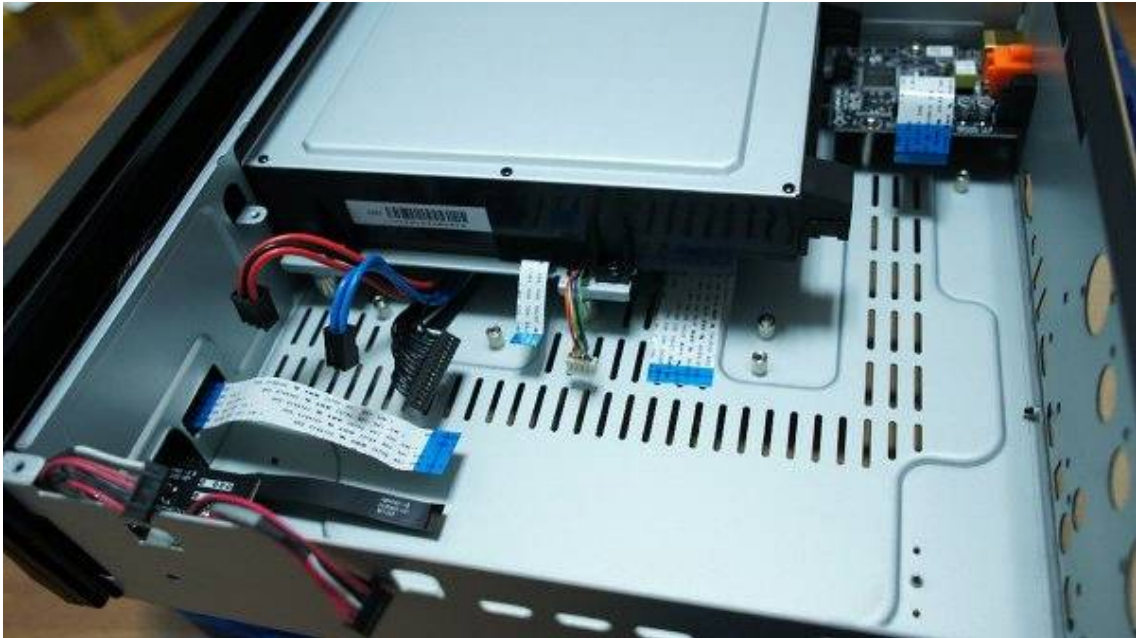

To install Linear power module , take out the black sheet at bottom.





dis-assembling is finished

